
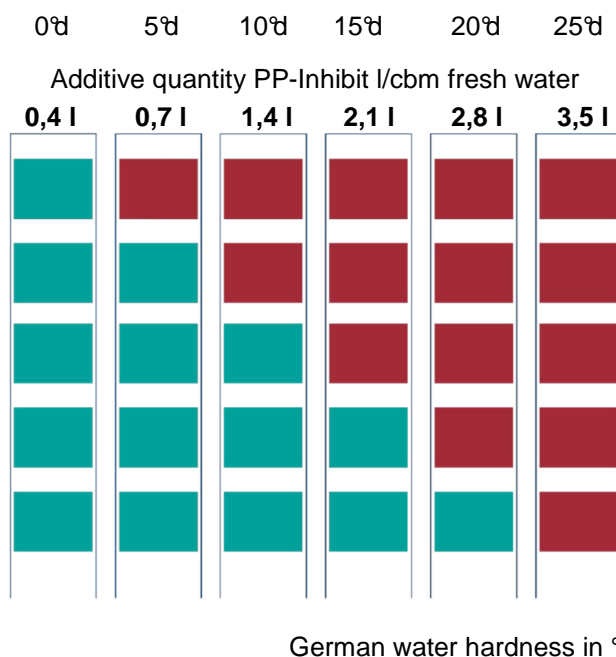


Technical data sheet

PetroPAN PP-Inhibit

Corrosion and stone inhibitor

Description	PetroPAN PP-Inhibit protects the tools during hot water application against magnetite and limestone deposits.
Applications	PP-Inhibit is used in open and closed cooling and hot water circuits. Used for corrosion and stone inhibition.
Specification	PP-Inhibit is liquid, light yellow to colourless.
Processing	The water hardness can be determined with Aquadur® test sticks before dosing PP-Inhibit (see table) The corresponding amount of PP inhibit must be added to the fresh water, see example: <i>Water hardness 10°d (2 x red and 3 x green) require s 1.4 l per 1,000 l fresh water</i>

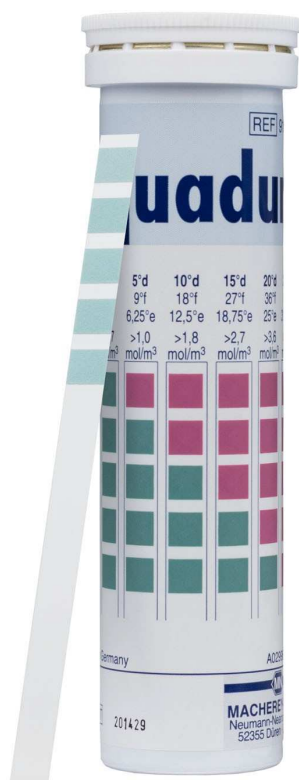

The values listed in the table are calculated theoretical assumptions and may differ from actual values in practice.

Disposal	The mixture produced by the cleaning process is to be treated in accordance with the legal provisions.
Hazard-	H315 Causes skin irritation. H319 Causes serious eye irritation.
and Precautionary- statements	P102 Keep out of reach of children. P280 Wear protective gloves/protective clothing/eye protection/face protection. P264 Wash ... thoroughly after handling. P305+P351+P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do – continue rinsing.



Attention